



C3-series


IP-based Door Access Control Panel

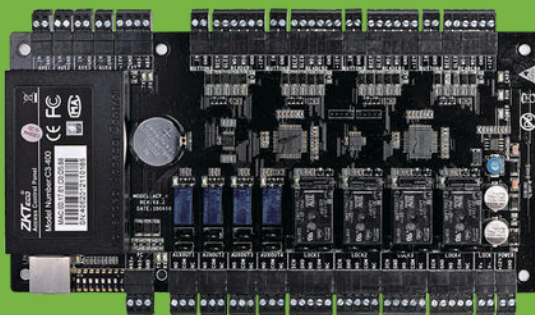

C3-400

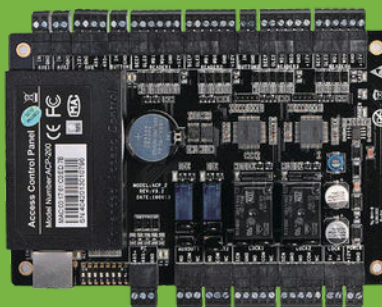

C3-200

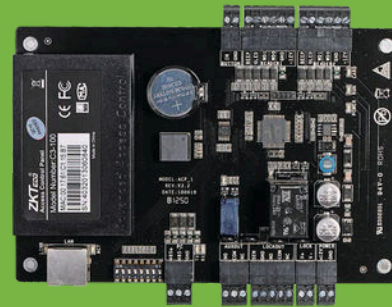

C3-100



Choice of Readers

Support full range of card readers. ZK KR-Series readers are stylish and waterproof. C3 supports any wiegand-output reader, including HID Prox, iClass, and XceedID Multi-Technology.



Communication

C3 controllers can be installed easily on your network and support TCP/IP communications. Auto-discovery tool allows setting and modification of network parameters directly and easily.



Lowest Total Cost of Ownership

Save cost. C3 controller firmwares can be upgraded without any advanced tools. New features can extend and expand the value of your investment.



Capacity

Support up to 30,000 badge users and store up to 100,000 events and transactions. Data is preserved if power is lost. Controller continues to operate if network connection is interrupted.



More than Door Control

Access additional control and interface. After programming, auxiliary relays can be functioned as lights, alarms and intrusion detection panels. Extra locking devices or gate controllers can be accessed.



Options

C3 controllers come in 3 sizes to suit project needs and reduce the cost of unused capacity. 1-door, 2-door, and 4-door models can be mixed and matched in an optimized system architecture, devices or gate controllers.



Built-In Advanced Access Control

Anti-Passback, First-Card Opening, Multi-Card Opening, Duress Password Entry, and Auxiliary Input/ Output linkages are built into controller firmware.



For Software Developers

Free SDK is available for integrators and OEM's to integrate the C3 controller with their or existing security or personnel management applications. Upon request, ZK can customize C3 firmware to meet any customer requirements.

Optional Accessories



CR20E/M



RFID Reader



Exit Button



Power Supply



Electric Lock



RS232 485



Alarm



Sensor




Prox Card



Key Fob

Typical Installation

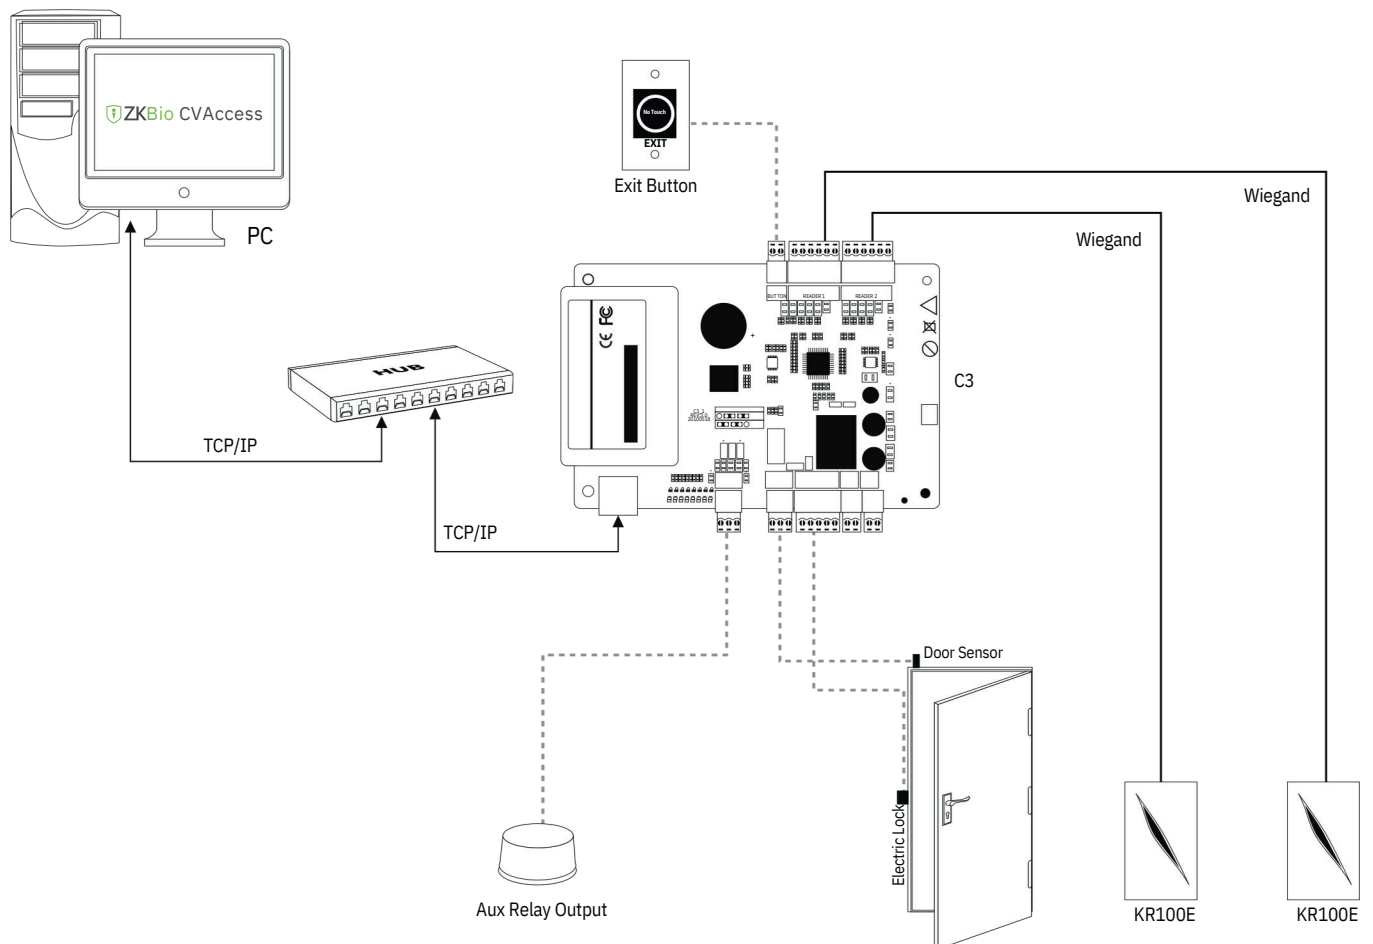

	Item	Description	Quantity
C3-100/200/400 Package B 	C3-100/200/400	Control Panel	1 ea 1 ea 1
	Case01	Metal Case	ea
	ZKPSM030B	Power Supply, DC12V/3A, Available to Charge for BAttery Back-Up	
	FR107	Diode for Lock	1
	Key	Key for Metal Case	ea
	ZKAccess CD	Access Software for Control Panel, User Manual	2
	Gross Weight	3.35-3.55kg	ea
	Dimensions	345(L)×70(H)×280(W)mm	1

Specifications

	C3-100	C3-200	C3-400
Number of Doors Controlled	1Door 2 26-bit Wiegand, others upon request	2 Door	4 Door
Number of Readers Supported	2 (Exit Device and Door Status)	4	4 26-bit Wiegand, others upon request
Types of Readers Supported	2 (1-From C Relay for Lock and 1-Form C Relay for Aux Output)	26-bit Wiegand, others upon request	12 (4 Exit Device, 4 Door Status, 4 AUX)
Number of Inputs	30,000	6 (2 Exit Device, 2 Door Status, 2 AUX)	8 (4-Form C Relay for Lock and 4-Form C Relay for Aux Output)
Number of Outputs	100,000	4 (2-From C Relay for Lock and 2-Form C Relay for Aux Output)	30,000
Card Holders Capacity	7.4lbs (3.35kg)	100,000	100,000
Log Events Capacity	TCP/IP and RS-485*	7.5lbs (3.4kg)	7.8lbs (3.55kg)
Weight	Powder Coated Aluminium	TCP/IP and RS-485*	TCP/IP and RS-485*
Communication	Wall Mount	Powder Coated Aluminium	Powder Coated Aluminium
Enclosure	12V DC, 1.5A	Wall Mount	Wall Mount
Mounting	15in.×3.15in.×11in. 380mm(L) X 80mm(W) X 280mm(H)	12V DC, 1.5A	12V DC, 1.5A
Recommended Power Supply	6.3in.×4.17in. (160mm×106mm)	15in.×3.15in.×11in. 380mm(L)×80mm(W)×280mm(H)	15in.×3.15in.×11in. 380mm(L)×80mm(W)×280mm(H)
Dimensions (Bundle Only)	6.3in.×4.17in. (160mm×106mm)	6.3in.×4.17in. (160mm×106mm)	6.3in.×4.17in. (160mm×106mm)
Dimensions (Board Only)			